

DESCO INDUSTRIES INCORPORATED

3651 WALNUT AVENUE, CHINO CA 91710
 PHONE (909) 627-8178 | WEB DescoIndustries.com

QUALIFICATION REPORT – ANSI/ESD S20.20

DESCO 17291 PREMIUM FULL COVERAGE FOOT GRINDER, TWO-MEG RESISTOR, MEDIUM

ANSI/ESD S20.20	DESCO Test Results	Test Methods
-----------------	--------------------	--------------

Point-to-Groundable-Point Resistance (ohms), 48-72 hours, 10V/100V, N=6 specimens

@12%RH, 23°C	< 1.0 x 10 ⁹	See Table 1	ANSI/ESD SP9.2
@ 50%RH, 23°C	< 1.0 x 10 ⁹	See Table 1	ANSI/ESD SP9.2

Test Equipment (Calibration records and test results are located at our corporate lab (Sanford, NC)):

For Test Method ANSI/ESD SP9.2:


- ETS Controlled Environment Chamber (Model 5532)
- SCS Surface Resistance Meter (Model 770761)

Test Data:

Table 1 – Resistance (ohms)

Specimen	Point-to-Groundable-Point Resistance (ohms)	
	@ 23°C, 12%RH, 48-72 hours	@ 23°C, 50%RH, 48-72 hours
1	2.03 x 10 ⁶	9.80 x 10 ⁵
2	2.01 x 10 ⁶	9.66 x 10 ⁵
3	2.06 x 10 ⁶	9.80 x 10 ⁵
4	2.02 x 10 ⁶	9.73 x 10 ⁵
5	2.05 x 10 ⁶	9.60 x 10 ⁵
6	2.01 x 10 ⁶	9.73 x 10 ⁵
Min =	2.01 x 10 ⁶	9.60 x 10 ⁵
Max =	2.06 x 10 ⁶	9.80 x 10 ⁵
Mean =	2.03 x 10 ⁶	9.72 x 10 ⁵

References:

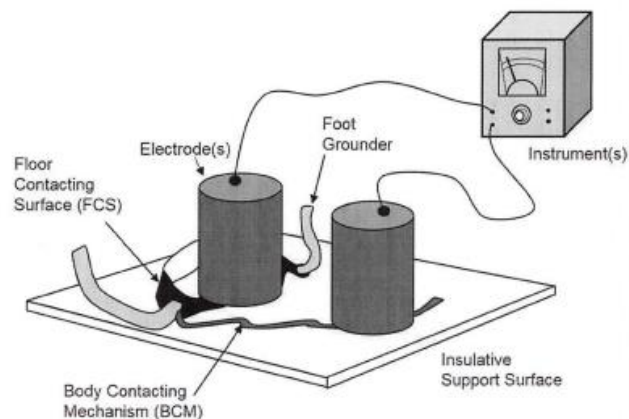

ANSI/ESD SP9.2 – Figure 1: Foot Grinder Resistance Test